




### Next Generation SOXLED

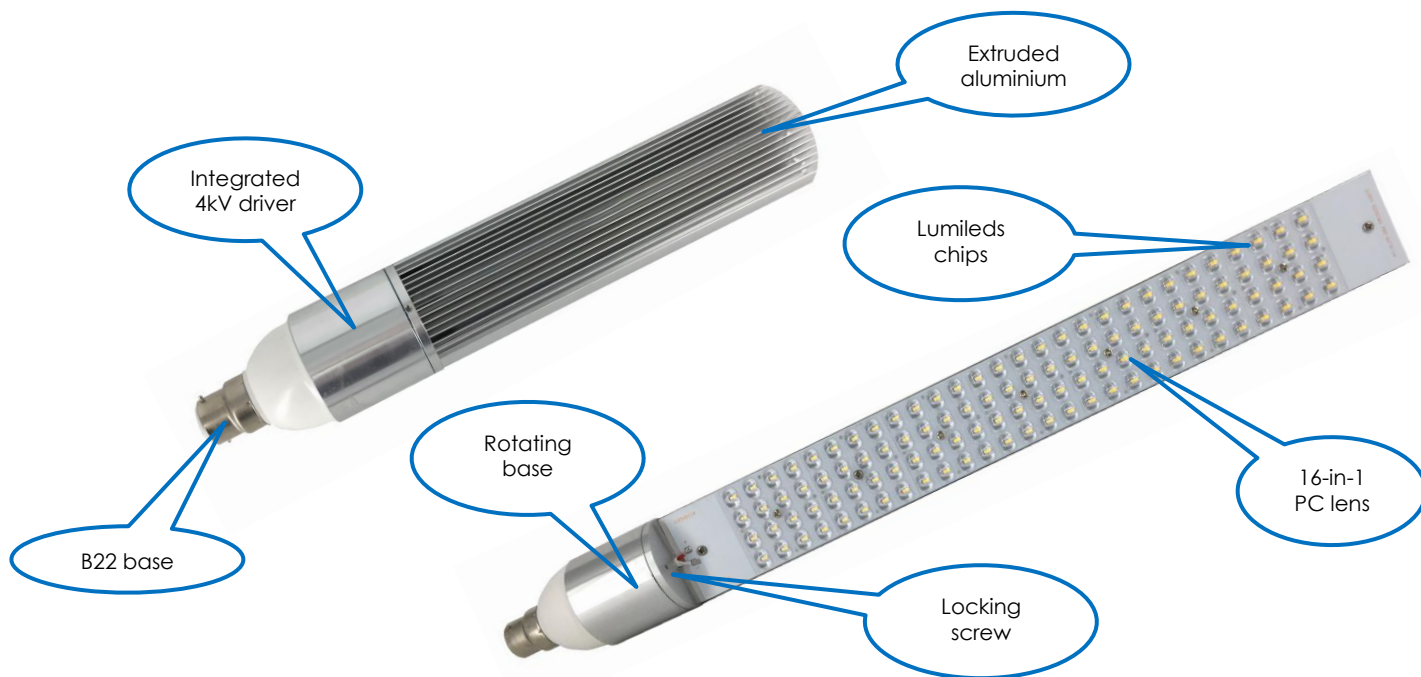

#### Features

- No external ballast
- 140Lm/W
- Rotating base
- PC lens
- 'Dark Sky' variant

#### Applications

MagnatechLED has designed and developed a unique direct replacement for the 35W, 55W, 90W, 135W and 180W SOX lamps and with similar dimensions to the original SOX bulb thus allowing for trouble-free retro-fit. The PC lens protects the chips from damage during handling and installation.

Model	SL07A16WccB22	SL08A18WccB22	SL09A28WccB22	SL10A40WccB22	SL11A56WccB22
Power	16W	18W	28W	40W	56W
Lumens	2240	2520	3920	5600	7840
LED Qty	48	80	112	176	256
LED type	Lumileds 1W 2835 or 3030				
CRI (DW)	>70				
Colour Temp.	cc is colour temp. 20=2000K (Dark Sky), 30=3000K, 40=4000K, 60=6000K				
Driver	85-265V 50/60Hz. Custom design.				
Beam Angle	140°70				
Dimensions	302*55mm	427*55mm	530*55mm	770*55mm	1030*55mm
Base.	B22				
Material	Case extruded aluminium, lens PC				
Protection	IP20, IK10				
Surge	4kV (a separate 10kV SPD should be fitted where powered from overhead cables)				
Packing	335*205*330 (15/box)	460*205*330 (15/box)	570*205*330 (15/box)	820*205*145 (6/box)	1060*205*145 (6/box)
G.W.	9.0kg	12.3kg	15.4kg	9.5kg	12.4kg
All packing information is nominal and will be confirmed at time of shipping.					
E&O E. Magnatech LED reserve the right to change details without notice.					